


PH642 - XLPE CHEMICAL SUCTION AND DISCHARGE HOSE W.P. 17 BAR

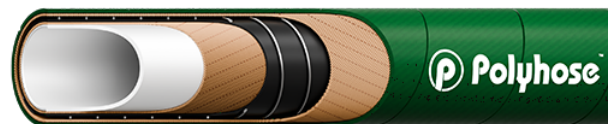

Construction

Inner tube	White colour, Synthetic rubber with XLPE liner
Reinforcement	Plies of synthetic textile cords with steel helix and two cross anti static copper wires
Cover	Green colour EPDM, wrapped type, abrasion and weather resistant
Application	Excellent in handling petroleum based products, hydrocarbon solvents, oxidising chemicals, major strong acid and alkali as well as organic fluid etc.,

Item Code	Dash Size	ID		OD		WP		BP		V	W
		inch	mm	inch	mm	psi	bar	psi	bar	bar	kg/m
PH642-12	-12	3/4	19.0	1.18	30.0	250	17	750	51	0.9	0.80
PH642-16	-16	1	25.0	1.38	35.0	250	17	750	51	0.9	1.39
PH642-20	-20	1.1/4	32.0	1.73	44.0	250	17	750	51	0.9	1.52
PH642-24	-24	1.1/2	38.0	1.97	50.0	250	17	750	51	0.9	2.00
PH642-32	-32	2	51.0	2.64	67.0	250	17	750	51	0.9	2.70
PH642-40	-40	2.1/2	63.0	3.11	79.0	250	17	750	51	0.9	3.20
PH642-48	-48	3	76.0	3.70	94.0	250	17	750	51	0.9	4.50
PH642-64	-64	4	102.0	4.72	120.0	250	17	750	51	0.9	4.80



Temperature Range : Continuous: -20°C to +120°C